

## Ceramic Fiber Insulation Products



Our Ceramic Fiber product line includes:


### Ceramic Blanket

- High-Purity grade: 2300°F (1260°C)
- Zirconia grade: 2600°F (1430°C)
- Standard Densities: 4, 6, 8 lbs./ft<sup>3</sup>
- Standard Thicknesses: 1/2", 1", 1.5", 2"
- Standard Widths: 24" & 48"



### Rigid Board

- High- Purity Grade (HP): 2100°F (1150°C)
  - Low Density (LD) = 16 lb/ft<sup>3</sup> (260 kg/m<sup>3</sup>)
  - High Density (HD) = 25 lb/ft<sup>3</sup> (400 kg/m<sup>3</sup>)
- Zirconium Grade (HZ): 2500°F (1370°C)
  - Density = 20 lb/ft<sup>3</sup> (360 kg/m<sup>3</sup>)
- Standard Thickness: 1/4", 1/2", 1", 1.5", 2"
- Standard Widths: 12", 24", 42"
- Standard Lengths: 36" & 48"

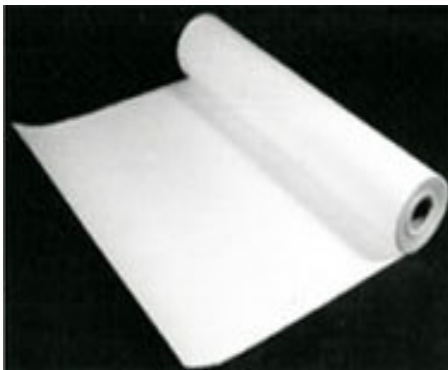

### Paper

- Standard grade: 2300°F (1260°C)
- Premium grade: 2300°F (1260°C)
- Zirconia grade: 2600°F (1430°C)
- Standard Thicknesses: 1/32", 1/16", 1/8", 1/4"
- Standard Widths: 24" & 48"
- Standard Packaging: Approximately 25 lb / roll  
(special packaging is available per requests).



### Textiles

- All continuous use max temp 2300°F (1260°C)
- Tape & Sleeveings
  - Standard widths = 1/2", 1", 2", 3", 6" (all 1/8" thick)
- Cloth
  - Rolls 36" width x 1/8" thick
- Braided & twisted rope
  - Diameters = 1/4", 3/8", 1/2", 5/8", 3/4", 1", 1 1/4", 1 1/2", 2"

---

Please contact: **Jerry Weinstein (518) 701-6722**  
Email: [jerryw@ceramaterials.com](mailto:jerryw@ceramaterials.com)  
For pricing: [www.ceramaterials.com](http://www.ceramaterials.com)